



## NetStream 3x200

NetStream 3x200 is a carrier-class radio that supports 3.5 GHz and complies with FCC, IC and Universal regulations (factory default: 3.5 GHz FCC/IC). This radio is part of the NetStream Series that delivers high capacity and extended range for carriers' backhaul needs.

Packing native TDM and Ethernet over a single wireless link, NetStream 3x200 provides 100 Mbps net aggregate throughput and up to 16 E1/T1 plus Ethernet.

NetStream 3x200 comes with an integrated antenna.

### Product Highlights

- 100 Mbps Ethernet net throughput and up to 16 E1s/T1s (Native TDM transport)
- Long range – up to 120 km/75 miles
- Supports intra-site and inter-site TDD synchronization to maximize network capacity
- Adaptive asymmetric throughput – dynamic allocation between uplink and downlink
- Advanced OFDM & MIMO technologies for operation in nLOS/NLOS and dense radio environments
- Robust and reliable to operate in tough conditions and extreme temperatures



## Product Specifications

### Configuration

Architecture	Outdoor Unit with integrated antenna
PoE to ODU Interface	Outdoor CAT-5e; Maximum cable length: 100 m for 10/100BaseT and 75 m for 1000BaseT

### Radio

Capacity	100 Mbps net aggregate throughput (up to 16 E1s/T1s plus Ethernet)
Range	Up to 120 km / 75 miles
Channel Bandwidth	Configurable: 5, 10 and 20 MHz (for the default band)
Modem Operations	Single chain, 2x2 Diversity, 2x2 MIMO
Modulation	2x2 MIMO-OFDM (BPSK/QPSK/16QAM/64QAM)
Adaptive Modulation & Coding	Supported
Automatic Channel Selection	Supported
DFS	Not Supported (for the default band)
Diversity	Supported
Spectrum View	Supported
Max Tx Power	25 dBm
Duplex Technology	TDD
Error Correction	FEC k = 1/2, 2/3, 3/4, 5/6
Processing speed	380,000 PPS
Encryption	AES 128; FIPS 197
Support Indoor units	IDU-NetStream RM and DT; NetStream PoE devices
Bandwidth Allocation	Configurable: Symmetric or Asymmetric
QoS	Packet classification to 4 priority queues according to 802.1p and Diffserv
VLAN Support	802.1Q, QinQ, 4094 VLANs
Ethernet Ring Protection	Supported, including Ethernet 1+1
TDD Intra Site Synchronization	Supported
TDD Inter Site Synchronization	Supported through common GPS receiver per site
Monitored Hot Standby (MHS)	1+1 with NetStream link

### Supported Bands

Band	Channel BW 5 MHz	Channel BW 10 MHz	Channel BW 20 MHz	Radio Compliance
3.6 GHz FCC/IC*	3.6505 - 3.6745	3.650 - 3.675	3.650 - 3.675	FCC 47CFR Part 90 subpart Z; IC RSS-197
3.5 GHz IC	3.4755 - 3.6495	3.473 - 3.652	3.468 - 3.657	IC RSS-192
3.5 GHz Universal	3.2975 - 3.8025	3.295 - 3.805	3.290 - 3.810	Universal
3.4 GHz Universal	3.3975 - 3.7025	3.395 - 3.705	3.390 - 3.710	Universal

\*Default band

### Mechanical

ODU Dimensions	37 (w) x 37(h) x 11(d) cm
ODU Weight	3.6 kg / 7.94 lbs

### Power

Power Feeding	Power provided over ODU-IDU cable
Power Consumption	<25 W

### Environmental

Operating Temperatures	-35°C to 60°C / -31°F to 140°F
Humidity	100% condensing, IP67 (totally protected against dust and against immersion up to 1 m)

### Safety

FCC/IC (cTUVus)	UL 60950-1, UL 60950-22, CAN/CSA C22.2 60950-1, CAN/CSA C22.2 60950-22
ETSI	EN/IEC 60950-1, EN/IEC 60950-22

### EMC

FCC	CFR47 Class B, Part15, Subpart B
ETSI	EN 300 386, EN 301 489-1, EN 301 489-4
CAN/CSA-CEI/IEC	CISPR 22-04 Class B




600-15 Allstate Parkway, Markham  
 Ontario, Canada  
 Tel: +1 (905) 415 4585  
 Email: info@netronics-networks.com

Netronics-networks.com

### Integrated Antenna

Gain	21 dBi
VSWR	1.5 : 1 (typ)
3 dB Beam width	12° (typ)
AZ & EL Beam Squint	0
Polarization	Dual Linear (Vertical and Horizontal)
Side lobes Level	ETSI EN 302 326-3 V1.1.2. DN3
Cross Polarization	ETSI EN 302 326-3 V1.1.2. DN3 -25 dB (max)
F/B Ratio	-25 dB
Port To Port Isolation	35 dB (min)
Lightning Protection	DC grounded

### Antenna Pattern

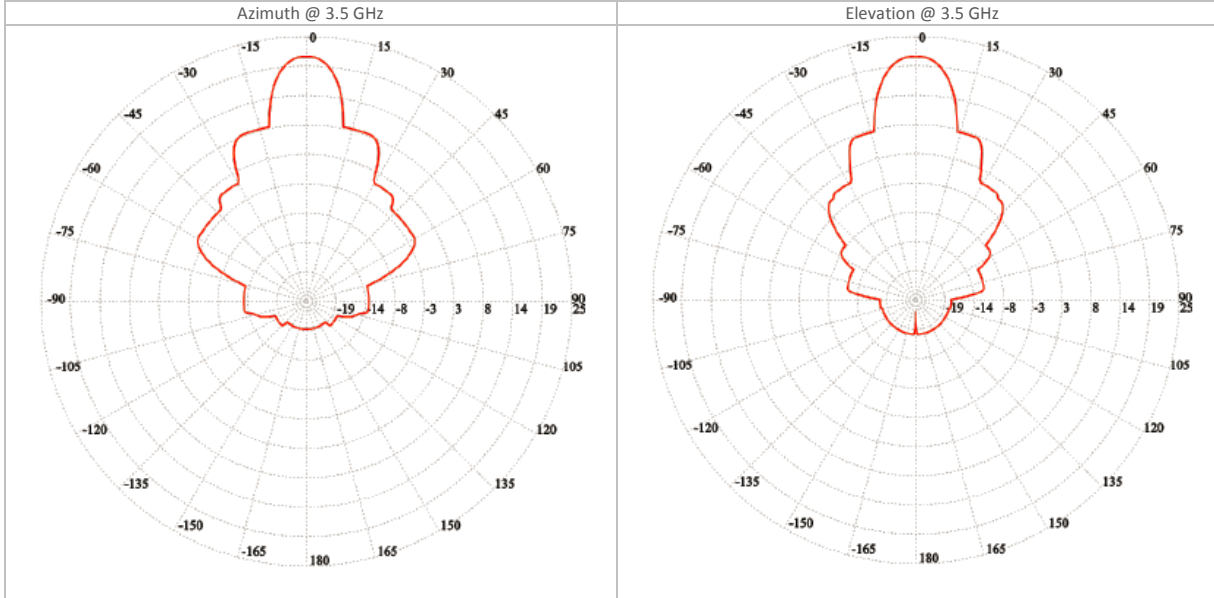

600-15 Allstate Parkway, Markham  
Ontario, Canada  
Tel: +1 (905) 415 4585  
Email: [info@netronics-networks.com](mailto:info@netronics-networks.com)

[Netronics-networks.com](http://Netronics-networks.com)